





1.Prepare the bios files that need to be updated

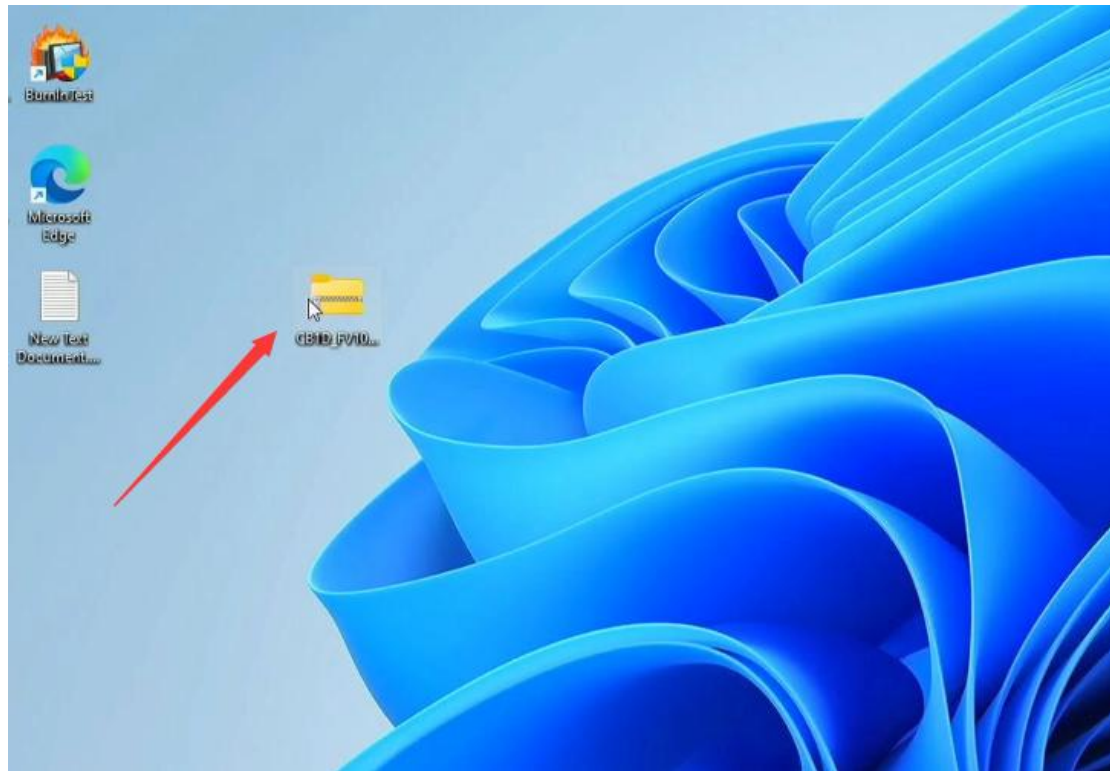


2. Extract the zip file to the desktop, the path indicated by the arrow in the figure below, and check “shou extracted files when complete”

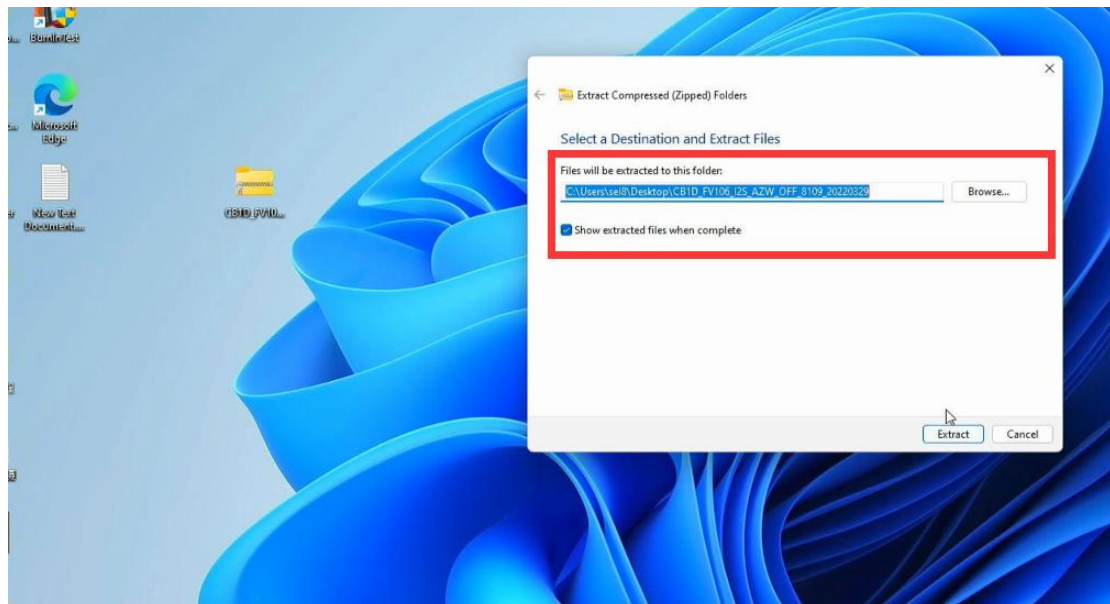


3. Open the decompressed file, and then double click to enter the folder, double click again on the Win folder

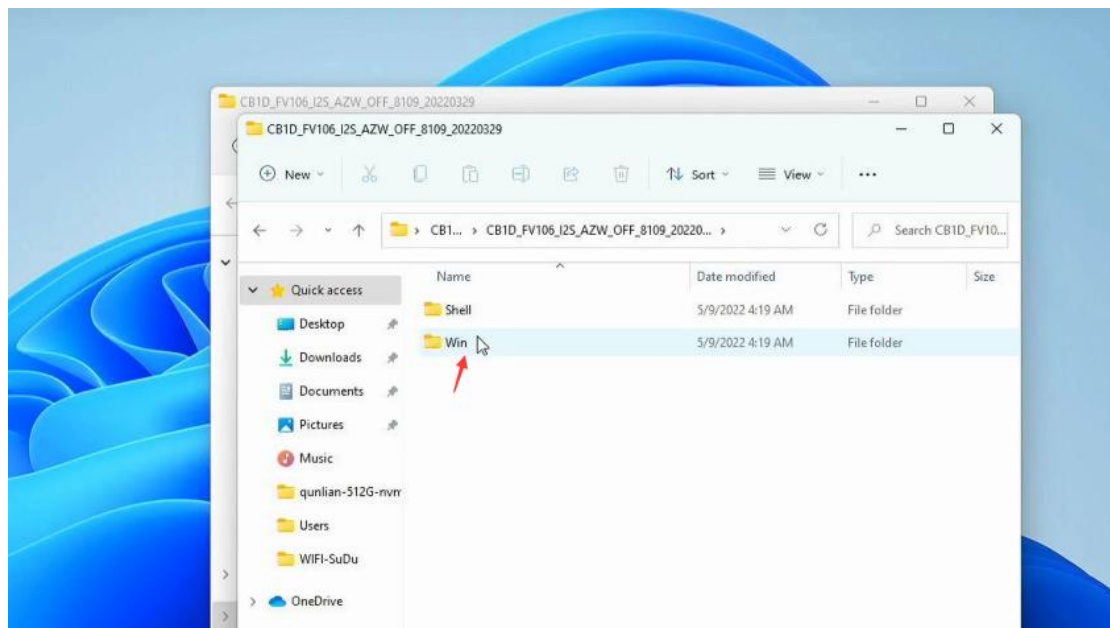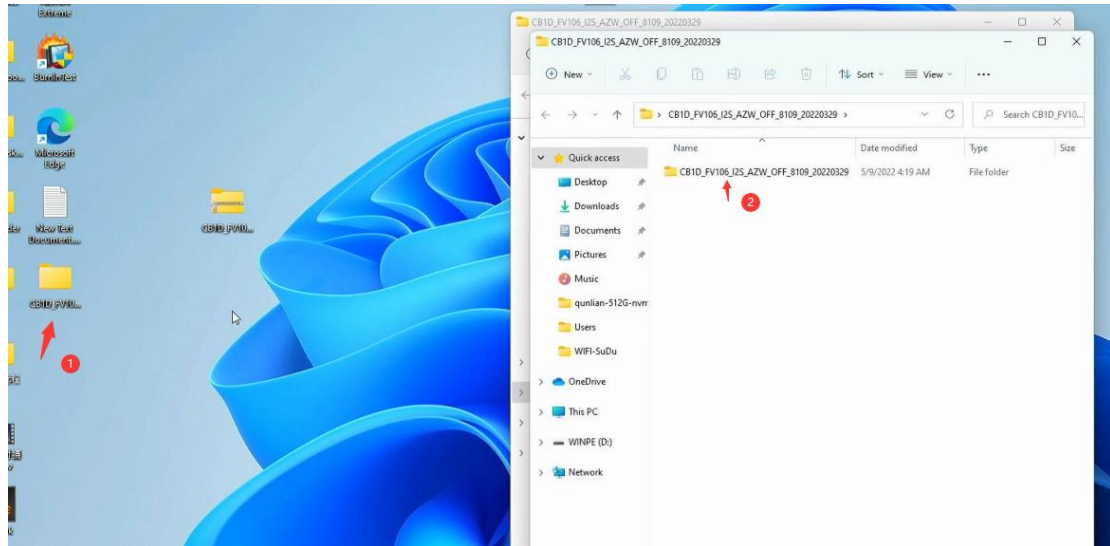


4. Select the address bar and copy the full name (ctrl+c <use keyboard>)

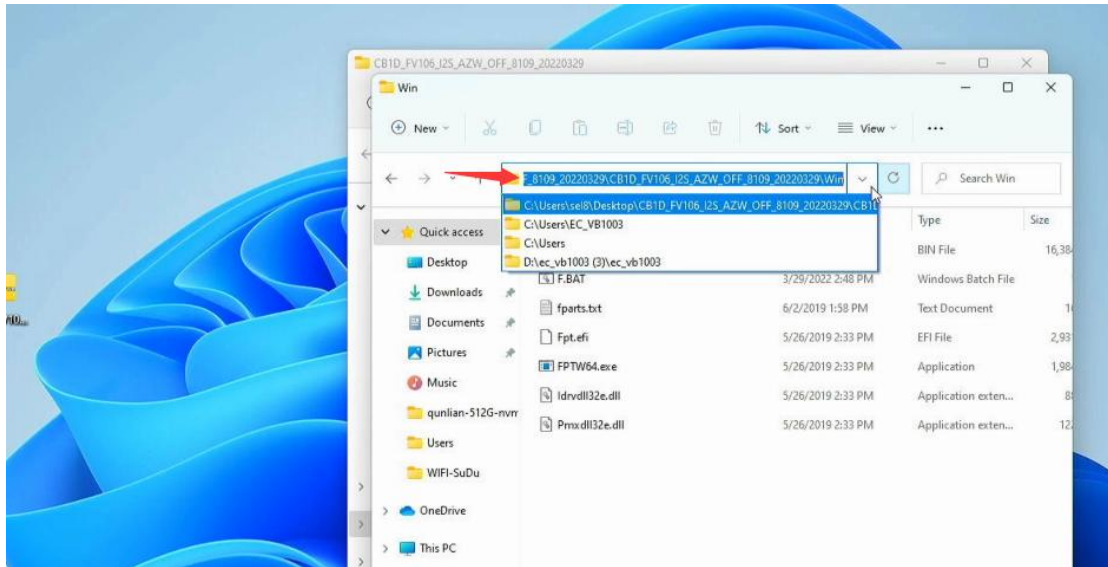


5. Right-click the Windows and select Windows Terminal (Admin) (1>2)

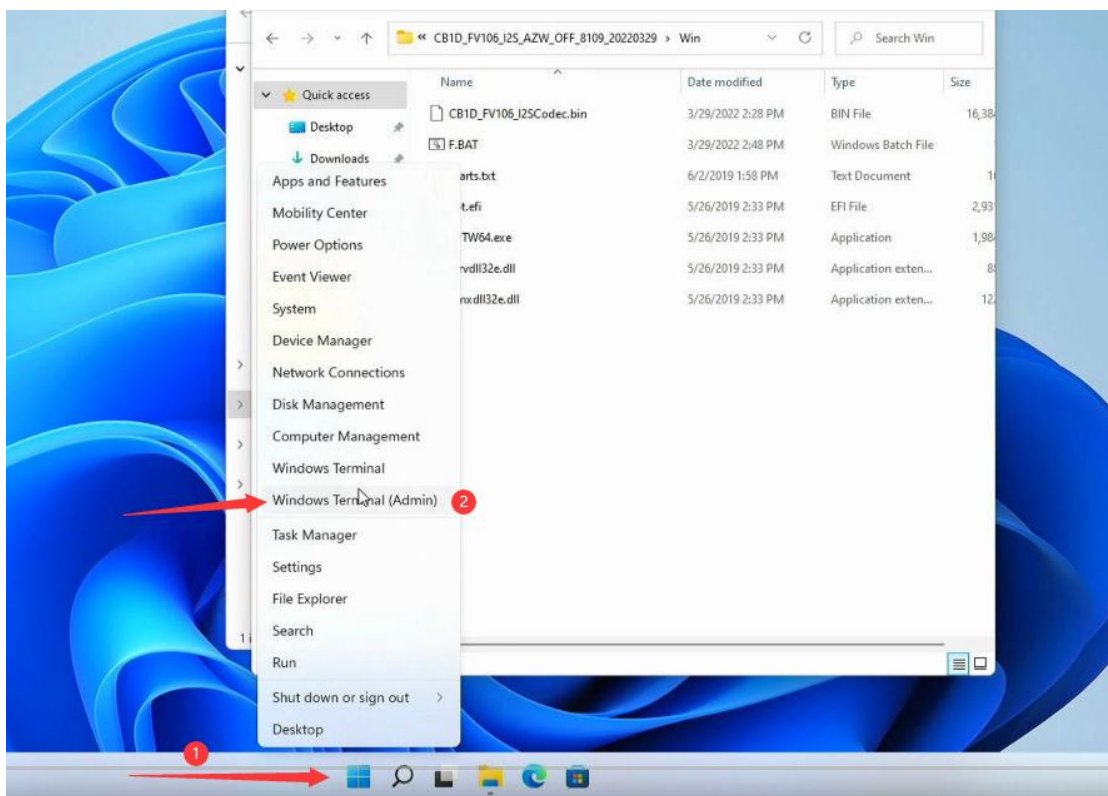


6. Click Yes

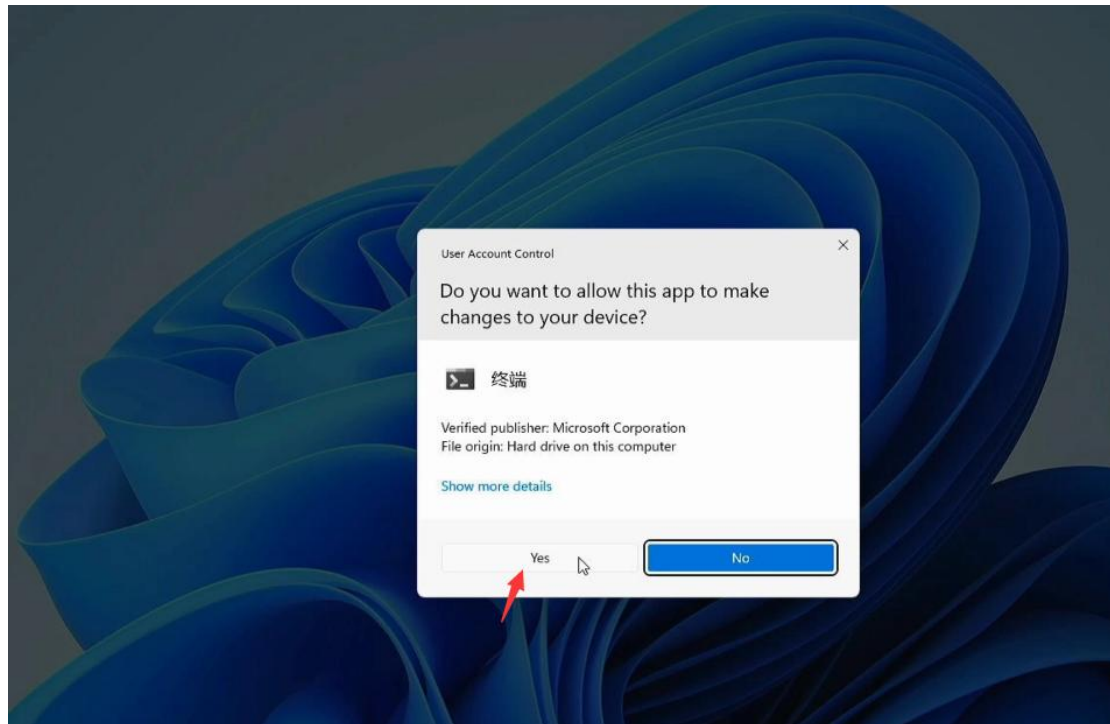


7.Type **CD** , click the space bar on your keyboard, then paste the name of the file (ctrl+v) and press the Enter<use keyboard>.

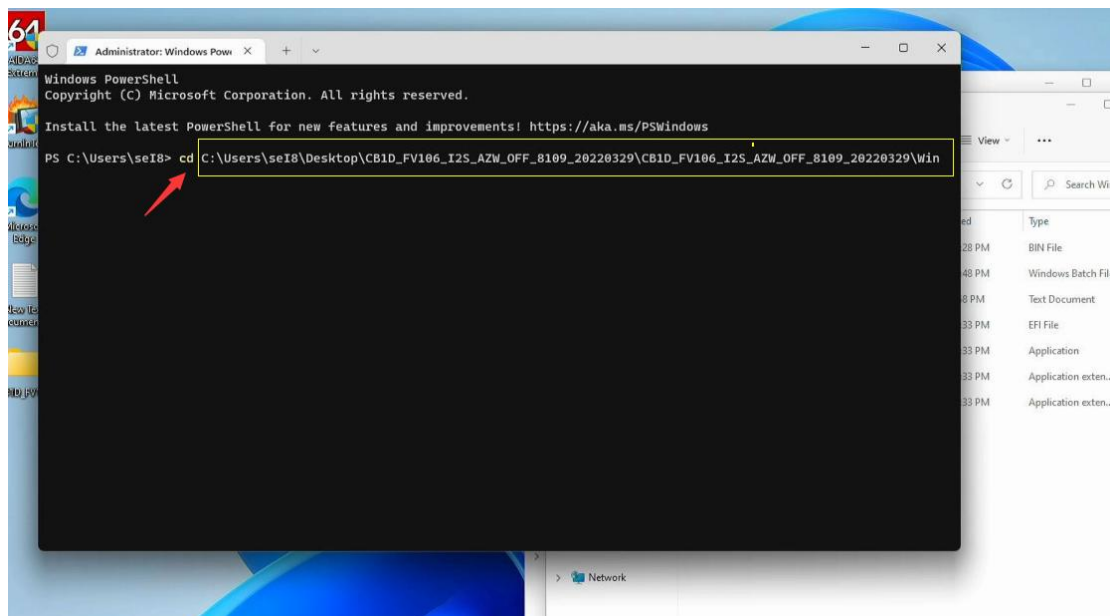


8. Type **ls** and press the Enter.

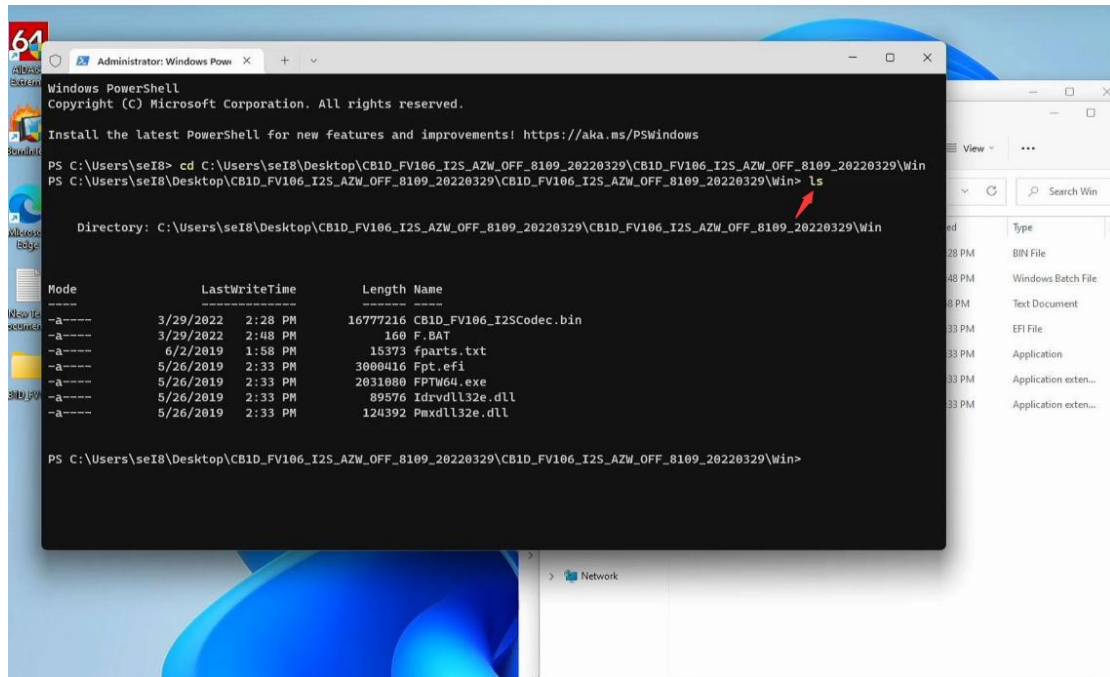

9. Type **F** and press <Tab> then Enter <use keyboard>.

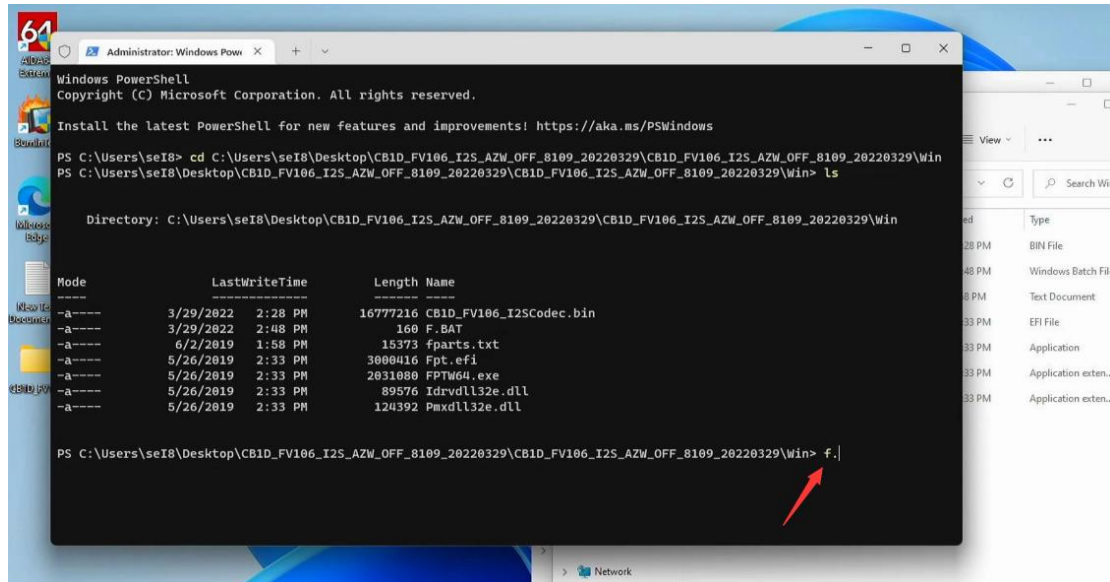

10.The system will enter the Bios update process, press any key to start

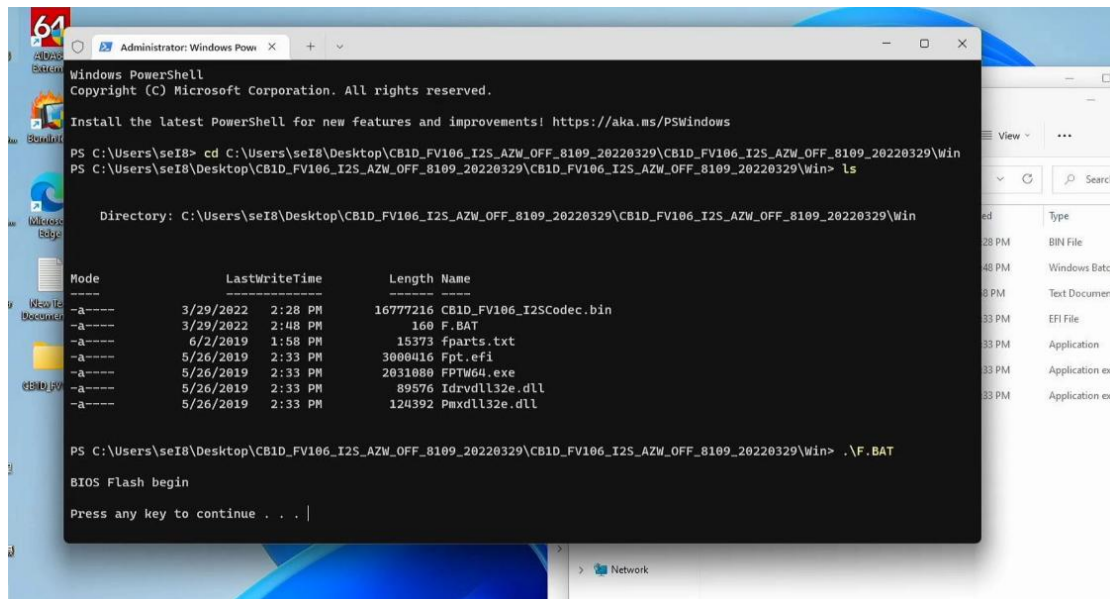

Administrator: Windows PowerShell

Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! <https://aka.ms/PSWindows>

```
PS C:\Users\seI8> cd C:\Users\seI8\Desktop\CB1D_FV106_I2S_AZW_OFF_8109_20220329\CB1D_FV106_I2S_AZW_OFF_8109_20220329\Win
PS C:\Users\seI8\Desktop\CB1D_FV106_I2S_AZW_OFF_8109_20220329\CB1D_FV106_I2S_AZW_OFF_8109_20220329\Win> ls
```

Directory: C:\Users\seI8\Desktop\CB1D_FV106_I2S_AZW_OFF_8109_20220329\CB1D_FV106_I2S_AZW_OFF_8109_20220329\Win


Mode	LastWriteTime	Length	Name
-a----	3/29/2022 2:28 PM	16777216	CB1D_FV106_I2SCodec.bin
-a----	3/29/2022 2:48 PM	160	F.BAT
-a----	6/2/2019 1:58 PM	15373	fparts.txt
-a----	5/26/2019 2:33 PM	3000416	Fpt.efi
-a----	5/26/2019 2:33 PM	2031080	FPTW64.exe
-a----	5/26/2019 2:33 PM	89576	Idrvdll32e.dll
-a----	5/26/2019 2:33 PM	124392	Pmxdll32e.dll

```
PS C:\Users\seI8\Desktop\CB1D_FV106_I2S_AZW_OFF_8109_20220329\CB1D_FV106_I2S_AZW_OFF_8109_20220329\Win> .\F.BAT
```

BIOS Flash begin

Press any key to continue . . . |

11.When the green font of FPT Operation successful appears, the program can be closed and the Bios update is complete.

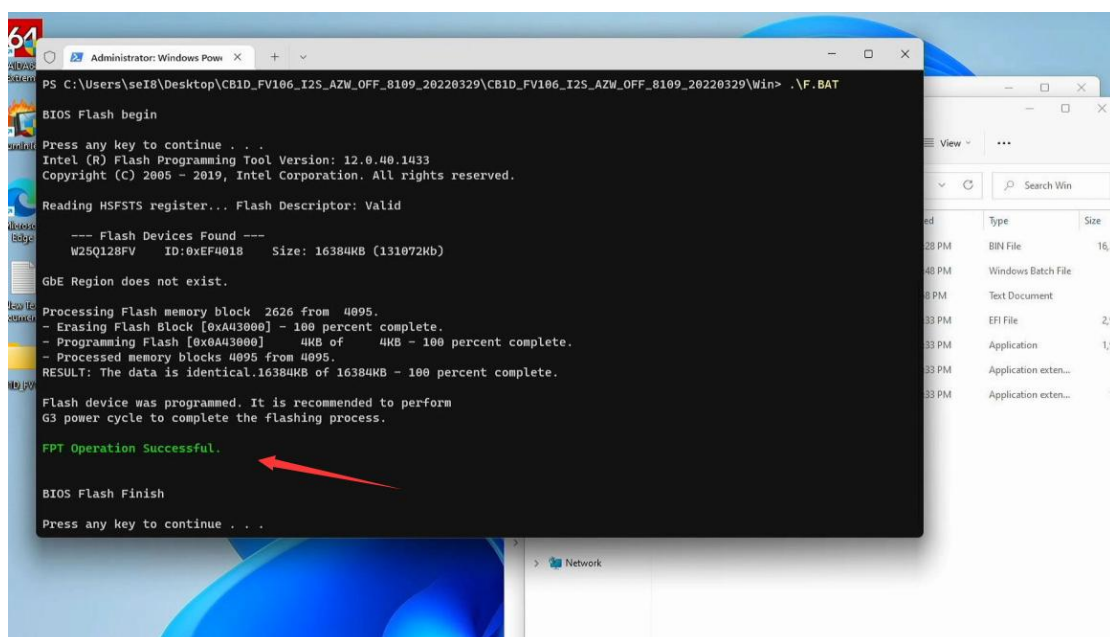

Administrator: Windows PowerShell

```
PS C:\Users\seI8\Desktop\CB1D_FV106_I2S_AZW_OFF_8109_20220329\CB1D_FV106_I2S_AZW_OFF_8109_20220329\Win> .\F.BAT
```

BIOS Flash begin

Press any key to continue . . .

Intel (R) Flash Programming Tool Version: 12.0.40.1433
Copyright (C) 2005 - 2019, Intel Corporation. All rights reserved.

Reading HSFSTS register... Flash Descriptor: Valid

--- Flash Devices Found ---
W25Q128FV ID:0xEF4018 Size: 16384KB (131072Kb)

GBE Region does not exist.

Processing Flash memory block 2626 from 4095.
- Erasing Flash Block [0xA43000] - 100 percent complete.
- Programming Flash [0xA43000] 4KB of 4KB - 100 percent complete.
- Processed memory blocks 4095 from 4095.
RESULT: The data is identical.16384KB of 16384KB - 100 percent complete.

Flash device was programmed. It is recommended to perform G3 power cycle to complete the flashing process.

FPT Operation Successful.

BIOS Flash Finish

Press any key to continue . . .